

7200 Pro and 8900 Series Tractor

Service Manual No. 7-67882

Table of Contents

Description	Section No.	Form No.
General	Tab 1	
General Information	1001	7-85710
Fuel Systems	Tab 3	
Fuel System Specifications	3001	7-87430
Fuel Tank	3004	7-87440
Electrical	Tab 4	
Wiring Schematics		7-66740
Troubleshooting	4001	7-66720
Alternator	4004	7-86300
Neutral Start Switch	4005	7-85531
Battery Servicing and Testing	4235	7-67360
Steering	Tab 5	
Steering Hand Pump and Steering Column	5001	7-85410
Steering Cylinder-2WD and MFD Tractors	5002	7-85291
Steering Axle and Lines-2WD	5003	8-91841
Power Train	Tab 6	
Tractor Split for Speed Transmission Service	6001	7-67491
Tractor Split for Pinion Shaft or Range Transmission Service	6002	7-67501
MFD Front Axle Removal and Installation	6003	7-68701
Transmission Valve	6004	7-67510
Speed Transmission	6005	7-67521
Range Transmission	6006	7-67531
Hydraulic Pump Drive	6007	7-68711
Rear Frame	6008	7-85671
Rear Axle and Planetaries	6009	7-67541
Single and Dual Shaft PTO	6010	7-67551
MFD Clutch Removal Without Tractor Split	6011	7-67560
MFD Differential	6012	8-91962
MFD Axle and Planetaries	6013	7-67891
Brakes	Tab 7	
Brake Valve	7001	7-85551
Hydraulic Trailer Brake Valve	7002	
Brake Cylinders	7003	7-67571
Pneumatic Trailer Brake Valve	7004	

CASE CORPORATION
 700 State Street
 Racine, WI 53404 U.S.A.

Reprinted

Description	Section No.	Form No.
Hydraulics	Tab 8	
Hydraulic Schematics		7-66730
Hydraulic Troubleshooting	8001	7-66710
Manual Shuttle Shift Transmission Testing and Troubleshooting	8002	7-85921
Electrical PTO Valve	8003	7-65430
Priority and Remote Valves	8004	7-87450
Hydraulic Filters	8005	7-60782
MFD solenoid Valve	8006	7-87720
Charge/Lube Dual Gear Pump	8007	7-87460
Hydraulic Piston Pump	8008	7-87470
Electronic Hitch Calibration and Error Codes	8009	7-67870
Tractor Hitch	8010	7-85741
Hitch Valve	8011	7-68761
Hydraulic Couplers	8013	8-95332
Chassis	Tab 9	
Air Conditioning Troubleshooting and System Checks	9001	7-67231
Air Conditioner System Service	9002	7-67241
Air Conditioning System and Compressor	9003	7-67251
Air Conditioning Components	9004	7-67260
Cab Blower	9005	7-87480
Tractor Seat	9006	7-87730
Hood, Grill, Side Panels, Radiator and Support	9007	7-87740
8900 Decal Locations	9008	7-87750
Cab Removal	9009	7-87760
Pedal and Lever Adjustment	9010	7-87770

Section 1001

GENERAL INFORMATION 7200 Pro and 8900 Series Tractors

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
450 Sherman Avenue
Hamilton, ON L8N 4C4 CANADA

Rac 7-85710

© 1998 Case Corporation
Printed in U.S.A.
March, 1998

TABLE OF CONTENTS

CONVERSION FACTORS 3

STANDARD TORQUE DATA FOR HYDRAULIC TUBES AND FITTINGS 5

FLUID CAPACITIES AND TYPES 6

 Engine Speeds 6

 Fuses 6

 Bulb and Lamp Replacement 6

STEERING AND OSCILLATION STOPS 7

 Mechanical Front Drive (MFD) 7

 Steering Stop 7

 Standard Steering Stop 7

 Optional Steering Stop 7

 Oscillation Stop 8

TIRE LOAD AND INFLATION CHARTS 11

NOTE: Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

CONVERSION FACTORS

U.S. Customary to SI (Metric) Units

SI (Metric) Units to U.S. Customary

	Multiply	By	To Obtain:	Multiply By	To Obtain
Area:	square foot (ft ²) acre	0.092 903 0.404 686	square meter (m ²) hectar (ha)	10.763 91 2.471 05	square foot (ft ²) acre
Force:	ounce force (ozf) pound force (lbf)	0.278 014 4.448 222	newton (N) newton (N)	3.598 942 0.224 809	ounce force (ozf) pound force (lbf)
Length:	inch (in) foot (ft) mile	25.4 0.304 8 1.609 344	millimetre (mm) meter (m) kilometer (km)	0.039 370 3.280 804 0.621 371	inch (in) foot (ft) mile
Mass:	pound (lb)	0.453 592	kilogram (kg)	2.204 622	pound (lb)
Mass/Area:	ton/acre	2241.702	kilogram per hectare (kg/ha)	0.000 446	ton/acre
Mass/Energy: (Fuel Consumption)	pound per brake horsepower- hour (lb/bhp-h)	608.277 4	gram per kilowatt hour (g/kwh)	0.001 644	pound per brake horsepower- hour (lb/bhp-h)
Mass/Volume: (Density)	pound per cubic yard (lb/yd ³) 0.593276	0.593 276	kilogram per cubic meter (kg/m ³)	1.685 555	pound per cubic yard (lb/yd ³)
Power	horsepower - U.S. customary (hp - U.S. customary)	0.745 700	kilowatt (kw)	1.341 02	horsepower - U.S. customary (hp - U.S. customary)
Pressure	pound per square inch (psi)	6.894 757	kilopascal (kPa)	0.145 038	pound per square inch (psi)
Temperature:	degrees Fahrenheit (°F)	TC=5/9 (TF-32)	degree celsius (°C)	TF=1.8 TC+32	degree Fahrenheit (°F)
Torque:	pound inch (lb in) pound foot (lb ft)	0.112 985 1.355 818	newton meter (Nm) newton meter (Nm)	8.850 748 0.737 562	pound inch (lb in) pound foot (lb ft)
Velocity (Speed):	miles per hour (mph)	1.609 344	kilometer per hour (km/h)	0.621 371	miles per hour (mph)
Volume:	cubic inch (in ³) cubic foot (ft ³) cubic yard (yd ³) ounce-U.S. fluid (oz) quart-U.S. liquid (qt) quart-Imperial (qt) gallon-U.S. liquid (gal) gallon-Imperial (gal)	16.387 06 0.028 317 0.764 555 29.573 53 .0946 353 1.136 523 3.785 412 4.546 092	cubic centimeter (cm ³) cubic meter (m ³) cubic meter (m ³) millimeter (ml) liter (l) liter (l) liter (l) liter (l)	0.621 024 35.314 66 1.307 950 0.033 814 1.056 688 0.879 877 0.264 172 0.219 969	cubic inch (in ³) cubic foot (ft ³) cubic yard (yd ³) ounce-U.S. fluid (oz) quart-U.S. liquid (qt) quart-Imperial (qt) gallon-U.S. liquid (gal) gallon-Imperial (gal)
Volume/Area:	bushel (U.S.) per acre	0.087 078	cubic meter per hectare (m ³ /ha)	11 484 000	bushel (U.S.) per acre
Volume/Time: (Flow)	gallon per minute (U.S.) (gpm U.S.) gallon per minute (Imperial)(gpm Imp.)	3.785 412 4.546 092	liter per minute (l/m) liter per minute (l/m)	0.264 172 0.219 969	gallon per minute (U.S.) (gpm U.S.) gallon per minute (Imperial) (gpm Imp.)
Horsepower:	U.S. customary hp net engine hp net engine hp	1.014 0.815* 0.70*	metric horsepower P.T.O. observed hp max drawbar hp	0.986.3	U.S. customary hp

SAE FASTENER TORQUE CHART

NOTE: Use these torques, unless special torques are specified. Values are for UNC and UNF thread fasteners, plated or unplated, as received from supplier. Fasteners can be dry or lubricated with normal engine oil. Values do not apply if graphite, moly-disulphide or other extreme pressure lubricant is used.

SAE Grade No.	2				5				8*			
Bolt head identification (See Note 1)					  				  			
Bolt Size	LB FT		Nm		LB FT		Nm		LB FT		Nm	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1/4	5	6	7	8	9	11	12	15	12	15	16	20
5/16	10	12	14	16	17	20.5	23	28	24	29	33	39
3/8	20	23	27	31	35	42	48	57	45	54	61	73
7/16	30	35	41	47	54	64	73	87	70	84	95	114
1/2	45	52	61	70	80	96	109	130	110	132	149	179
9/16	65	75	88	102	110	132	149	179	160	192	217	260
5/8	95	105	129	142	150	180	203	244	220	264	298	358
3/4	150	185	203	251	270	324	366	439	380	456	515	618
7/8	160	200	217	271	400	480	542	651	600	720	814	976
1	250	300	339	406	580	696	787	944	900	1080	1220	1464
1-1/8					800	880	1085	1193	1280	1440	1736	1953
1-1/4					1120	1240	1519	1681	1820	2000	2468	2712
1-3/8					1460	1680	1980	2278	2380	2720	3227	3688
1-1/2					1940	2200	2631	2983	3160	3560	4285	4827

NOTE 1: Bolt head identification marks as per grade. Manufacturing marks will vary.

*Thick nuts must be used with Grade 8 bolts

METRIC FASTENER (ISO) TORQUE CHART

NOTE: Use these torques, unless special torques are specified. Values are for coarse thread fasteners, plated or unplated, as received from supplier. Fasteners can be dry or lubricated with normal engine oil. Values do not apply if graphite, moly-disulphide or other extreme pressure lubricant is used.

ISO Class No.	8.8				10.9				12.9			
Bolt head identification (See Note 1)												
Bolt Size	Nm		LB FT		Nm		LB FT		Nm		LB FT	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
M4	3	4	2	3	4	5	3	4	Because of the low ductility of these fasteners, the torque range is to be determined individually for each application. As a general rule, the torque ranges specified for grade 10.9 fasteners can be used satisfactorily on 12.9 fasteners. *M14 is not a preferred size			
M5	6.5	8	5	6	9.5	11	7	8				
M6	10.5	12	8	9	15	17.5	11	13				
M8	26	31	19	23	37	43	27	32				
M10	52	61	38	45	73	87	54	64				
M12	90	107	66	79	125	150	93	112				
*M14	144	172	106	127	200	245	149	179				
M16	217	271	160	200	310	380	230	280				
M20	434	515	320	380	610	730	450	540				
M24	675	815	500	600	1050	1275	780	940				
M30	1250	1500	920	1100	2000	2400	1470	1770				
M36	2175	2600	1600	1950	3500	4200	2580	3090				

NOTE: Bolt head identification marks as per grade. Manufacturing marks will vary.

STANDARD TORQUE DATA FOR HYDRAULIC TUBES AND FITTINGS

TUBE NUTS FOR 37° FLARED FITTINGS								O-RING BOSS PLUGS, ADJUSTABLE FITTING LOCK NUTS, SWIVEL JIC - 37° SEATS			
SIZE	TUBING O.D.		THREAD SIZE	LB FT		Nm		LB FT		Nm	
	Inches	mm		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
4	1/4	6.4	7/16-20	9	12	12	16	6	10	8	14
5	5/16	7.9	1/2-20	12	15	16	20	10	15	14	20
6	3/8	9.5	9/16-18	21	24	29	33	15	20	20	27
8	1/2	12.7	3/4-18	35	40	47	54	25	30	34	41
10	5/8	15.9	7/8-14	53	58	72	79	35	40	47	54
12	3/4	19.1	1-1/16-12	77	82	104	111	60	70	81	95
14	7/8	22.2	1-3/16-12	90	100	122	136	70	80	95	109
16	1	25.4	1-5/16-12	110	120	149	163	80	90	108	122
20	1-1/4	31.8	1-5/8-12	140	150	190	204	95	115	129	156
24	1-1/2	38.1	1-7/8-12	160	175	217	237	120	140	163	190
32	2	50.8	2-1/2-12	225	240	305	325	250	300	339	407

Above torque figures are recommended for plain, cadmium or zinc plated fittings, dry or wet installations and swivel nuts either swaged or brazed. These torques are not recommended for tubes 1/2 inch (12.7 mm) O.D. and larger with wall thickness of 0.035 inch (0.889 mm) or less. The torque is specified for 0.035 inch (0.889 mm) wall tubes on each application individually.

FLUID CAPACITIES AND TYPES

Engine Crankcase Capacity, without Filter Change	19 Litres (5 Gallons)
with Filter Change	21 Litres (5.5 Gallons)
Fluid Type	Case No. 1 Multi-Viscosity Engine Oil
Transmission/Hydraulic System Capacity	172 Litres (45.5 Gallons)
Fluid Type	Hy-Tran Plus® Fluid

Differential Housing Capacity - MFD	11 Litres (3 Gallons)
Planetary Housing Capacity - MFD (Each)	0.9 Litres (1 Quart)
Fluid Type	Case 135H EP Gear Lubricant, SAE 85W-140
Use one pint of Limited Slip additive in the differential	

Cooling System Capacity - with Cab	
8910 and 8920 (7210 and 7220 Pro)	27.6 Litres (29 Quarts)
8930 (7230 Pro)	29.4 Litres (31 Quarts)
8940 and 8950 (7240 and 7250 Pro)	31.3 Litres (33 Quarts)
Fluid Type	50 Percent Ethylene Glycol Coolant

Engine Speeds

Governed Engine Speed without Load	2370 to 2530 RPM
Rated Engine Speed	2200 RPM
Engine Idle Speed	925 to 1025 RPM

Fuses

Dome Lamp and Radio Clock	5 Amp
Fuel Shut-off	5 Amp
Shut Down Override	15 Amp
Instrument Cluster - Run Position	7.5 Amp
Instrument Cluster - Accessory Position, PTO	10 Amp
Radio	5 Amp
Electronic Hitch System	7.5 Amp
Cigar Lighter	10 Amp
Ether Starting Aid	15 Amp
Differential Lock	10 Amp
Tail Lamps	10 Amp
Warning Lamps	15 Amp
Cab Roof Work Lamps	15 Amp
Air Seat	20 Amp
Mechanical Front Drive (If Equipped) (Less 3 Point Hitch)	7.5 Amp
Mechanical Front Drive (If Equipped) (With 3 Point Hitch)	5 Amp
Creeper Drive (If Equipped)	7.5 Amp

Bulb and Lamp Replacement

Dome Lamp Bulb	K913579
Console Lamp Bulb	No. 194
Flasher Lamp Bulb	No. 1156
Head Lamps	No. H4
Front and Rear Flood Lamps	No. H3
Tail Lamp Bulbs	No. 168
Rocker Switch Bulb	No. 3141107R1
Three Point Hitch Indicator Bulb	No. 182
Instrument Cluster Illuminating Bulb	No. 161

STEERING AND OSCILLATION STOPS


Mechanical Front Drive (MFD)

Tractors with mechanical front drive (MFD) are equipped with steering and oscillation stops. The steering and oscillation stops are used to give the required steering clearance between the front tires

and tractor frame. The front tire size and tread width being used, will determine the required steering and oscillation angles.


Steering Stop

Each adjustment hole in the steering stop (1) is identified with an arrow and a number. With the arrow pointing toward the wheel, the number indicates the turn angle when the mounting pin is installed in that hole. With the pin installed in the desired hole, the angle number will be visible outside the steering knuckle casting. The steering stop can be installed in either direction depending on the tire size and tread width being used.

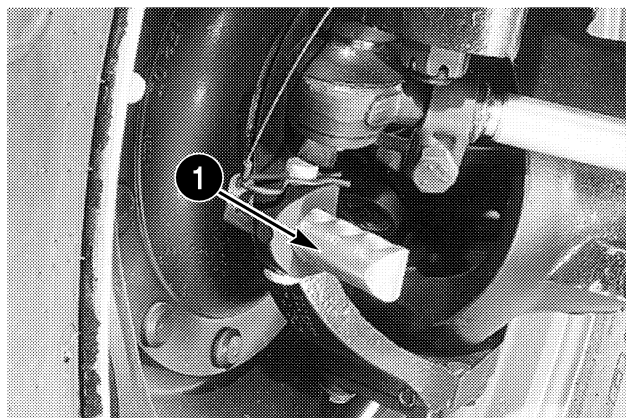


RP96H043

Standard Steering Stop

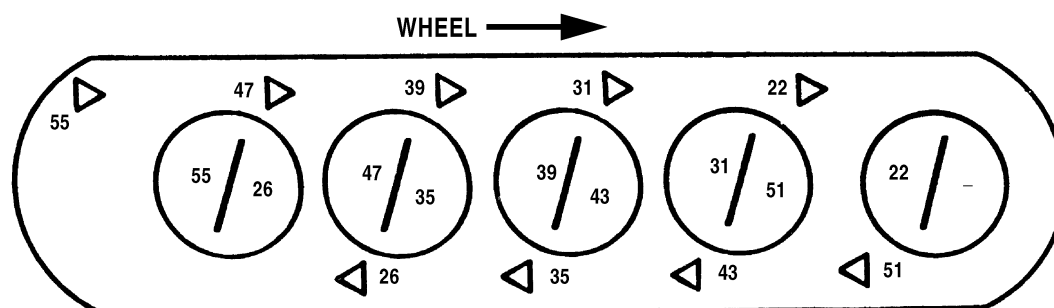

RB96H024

Optional Steering Stop

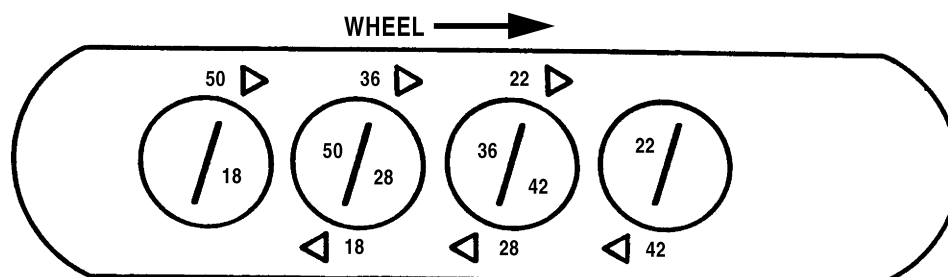


755L93

An optional steering stop is available thru service. This stop allows the use of MFD fenders at a 64 inch tread and can be used to improve turning radius with some MFD tire options.

NOTE: If the steering angle recommended on the steering stop chart is not available on the stop rod that your tractor is equipped with, you should use the next smaller angle.


Oscillation Stop

Oscillation stops (2) are required for some tire size and tread width combinations. The oscillation stops are installed on the axle stop pad on each side of the tractor.

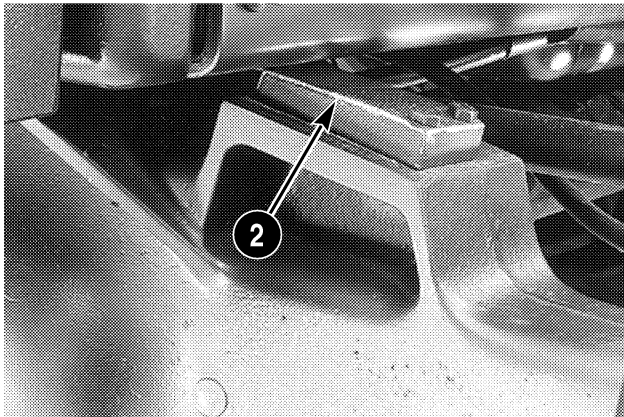

RP96H035

LIMITS OSCILLATION TO 6 DEGREES

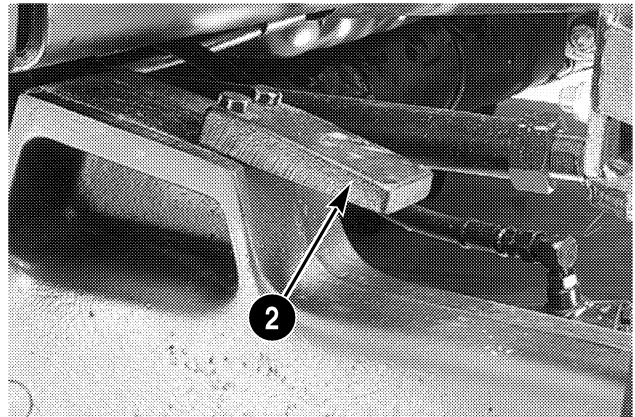

RP96H036

ALLOWS 11 DEGREES OF OSCILLATION

Steering and Oscillation Stop Charts - without Fenders

The following charts show the steering stop turn angle and oscillation stop requirement for each tread width and tire size combination for tractors without fenders.

8900 SERIES MAGNUM

STEERING AND OSCILLATION STOP CHARTS - WITHOUT FENDERS									
TIRE/WHEEL SIZE		TREAD WIDTHS (INCHES)							
		60	64	68	72	76	80	84	88
16.9R26 (W15L X 26)	Steer	22	31	35 or 36*	39	43	47	51	55
	Osc.	6	6	6	6	11	11	11	11
18.4R26 (W15L X 26)	Steer	18*	26 or 28*	31	39	43	47	51	55
	Osc.	6	6	6	6	11	11	11	11
13.6R28 (W12 X 28)	Steer	31	39	43	51	55	55	55	55
	Osc.	6	6	6	6	11	11	11	11S
14.9R28 (W12 X 28)	Steer	26	35 or 36*	39	47	51	55	55	55
	Osc.	6	6	6	6	11	11	11	11
16.9R28 (W15L X 28)	Steer	18* or 22	31	35 or 36*	39	43	51	55	55
	Osc.	6	6	6	6	11	11	11	11
14.9R30 (DWW13 X 30)	Steer	26	35 or 36*	39	43	47	51	55	55
	Osc.	6	6	6	6	11	11	11	11
16.9R30 (DWW15 X 30)	Steer	18*	26 or 28*	35 or 36*	39	43	47	47	55
	Osc.	6	6	6	6	11	11	11	11
480/70R28 (W15L X 28)	Steer	18*	26 or 28*	35 or 36*	39	43	51	55	55
	Osc.	6	6	6	6	11	11	11	11
600/65R28 (W18L X 28)	Steer	NA	NA	26	35 or 36*	39	47	47	51
	Osc.			6	6	11	11	11	11
480/70R30 (DWW15 X 30)	Steer	18*	26 or 28*	35 or 36*	39	43	47	51	55
	Osc.	6	6	6	6	11	11	11	11

*Requires the use of the optional steering stop rod available through service parts.

NOTE: N.A. indicates that the tread width is not approved for these tire sizes because of clearance requirements.

NOTE: See your dealer for information on any tire size not included in the chart.

Steering and Oscillation Stop Charts - with Fenders

The following charts show the steering stop turn angle and oscillation stop requirement for each tread width and tire size combination for tractors equipped with fenders.

8900 SERIES MAGNUM

STEERING AND OSCILLATION STOP CHARTS - WITH FENDERS									
TIRE/WHEEL SIZE		TREAD WIDTHS (INCHES)							
		60	64	68	72	76	80	84	88
16.9R26 (W15L X 26)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
18.4R26 (W15L X 26)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
13.6R28 (W12 X 28)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
14.9R28 (W12 X 28)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
16.9R28 (W15L X 28)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
14.9R30 (DWW13 X 30)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
16.9R30 (DWW15 X 30)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
480/70R28 (W15L X 28)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11
600/65R28 (W18L X 28)	Steer	NA	NA	NA	22 or 26**	26	31	39	43
	Osc.			NA	6	6	11	11	11
480/70R30 (DWW15 X 30)	Steer	NA	18*	22	22 or 26**	26	31	39	43
	Osc.		6	6	6	6	11	11	11

*Requires the use of the optional steering stop rod available through service parts.

**The steering stop rod setting depends on the MFD fender configuration used.

NOTE: N.A. indicates that the tread width is not approved for these tire sizes because of clearance requirements.

NOTE: See your dealer for information on any tire size not included in the chart.

TIRE LOAD AND INFLATION CHARTS

NOTE: Load and Inflation Charts are based on (40 km/h) 25 MPH travel speed.

Front Tires (2WD) U.S. Standard

TIRE SIZE	MAXIMUM FRONT TRACTOR WEIGHT (LBS) AT VARIOUS COLD INFLATION PRESSURES (PSI)									
	24	28	32	36	40	44	48	52	56	60
11.00-16 (12 ply) F2M	3740	4180	4540	4940	5200	5520	5820	6160	6600	6840
14L-16.1 (10 ply) F2M	4540	5080	5660	6000	6400	6840				

Front Tires (MFD) U.S. Standard

TIRE SIZE	MAXIMUM FRONT TRACTOR WEIGHT (LBS) AT VARIOUS COLD INFLATION PRESSURES (PSI)												
	6	8	10	12	14	16	18*	20	22	24**	26	28	30***
13.6R28 3* R1	2940	3480	3980	4420	4840	5240	5660	5960	6320	6840	6960	7280	7480
14.9-28 (10 ply) R1				5260	5760	6240	6680	7100	7500	7900	8280	8640	9000
14.9R28 3* R1	3520	4160	4740	5260	5760	6240	6600	7120	7520	7920	8280	8640	9080
14.9R30 3* R1, R1W	3620	4280	4880	5440	5940	6440	6840	7320	7760	8160	8560	8920	9360
16.9-28 (10 ply) R1						7560	8100	8620	9120	9600	10,060	10,500	
16.9R28 2* R1, R1W, R2	4260	5040	5740	6400	7000	7560	8160	8640	9120	9880			
16.9R30 3* R1, R1W	4400	5200	5940	6600	7240	7800	8360	8880	9400	10,160	10,400	10,720	11,360
480/70R28 143A8 R1W	5250	6050	6470	7280	7880	8350	9390	10,010	10,470				
480/70R30 152A8 R1W	5380	5660	6700	7530	8071	8610	9680	10,250	10,770	11,750	12,250	13,130	13,920
600/65R28 150A8 R1W	6830	7280	8630	9680	10,350	11,030	12,410	13,400	14,030				

Front Tires (2WD) Metric

TIRE SIZE	MAXIMUM FRONT TRACTOR WEIGHT (kg) AT VARIOUS COLD INFLATION PRESSURES (kPa)									
	165	193	221	248	276	303	331	359	386	414
11.00-16 (12 ply) F2M	1700	1900	2060	2240	2360	2500	2640	2790	2990	3100
14L-16.1 (10 ply) F2M	2060	2300	2570	2720	2900	3100				

Front Tires (MFD) Metric

TIRE SIZE	MAXIMUM FRONT TRACTOR WEIGHT (kg) AT VARIOUS COLD INFLATION PRESSURES (kPa)												
	41	55	69	83	97	110	124*	138	152	165**	179	193	207***
13.6R28 3* R1	1330	1580	1800	2000	2200	2380	2570	2700	2870	3100	3160	3300	3390
14.9-28 (10 ply) R1				2390	2610	2830	3030	3220	3400	3580	3760	3920	4080
14.9R28 3* R1	1600	1890	2150	2390	2610	2830	3000	3230	3410	3590	3760	3920	4120
14.9R30 3* R1, R1W	1640	1940	2210	2470	2690	2920	3100	3320	3520	3700	3880	4050	4250
16.9-28 (10 ply) R1						3430	3670	3910	4140	4360	4560	4760	
16.9R28 2* R1, R1W & R2	1930	2290	2600	2900	3180	3430	3700	3920	4140	4480			
16.9R30 3* R1, R1W	2000	2360	2690	2990	3280	3540	3790	4030	4260	4610	4720	4860	5150
480/70R28 143A8 R1W	2380	2740	2940	3300	3570	3790	4260	4540	4750				
480/70R30 152A8 R1W	2440	2570	3040	3420	3660	3900	4390	4650	4890	5330	5560	5960	6310
600/65R28 150A8 R1W	3100	3300	3920	4390	4700	5000	5630	6080	6360				

Rear Tires (used as singles) U.S. Standard

TIRE SIZE	MAXIMUM REAR TRACTOR WEIGHT (LBS) AT VARIOUS COLD INFLATION PRESSURES (PSI)												
	6	8	10	12	14	16	18*	20	22	24**	26	28	30***
14.9R46 3* R1	4520	5340	6080	6760	7400	8000	8600	9120	9680	10,160	10,640	11,120	11,680
420/80R46 3* R1	6020	6470	7570	8440	9040	9860	11,090	11,510	12,140	13,240	14,250	14,680	15,720
18.4R38 1* R1	5920	7000	7960	8880	9720	10,520	11,360						
18.4R42 2* R1, R1W, R2	6240	7400	8400	9360	10,240	11,080	12,000	12,600	13,300	13,900			
18.4R46 3* R1	6560	7760	8840	9840	10,800	11,640	12,300	13,300	14,000	14,800	15,500	16,200	17,100
20.8R38 1* R1, R2	7160	8480	9680	10,760	11,760	12,700	13,600						
20.8R38 153A8 R1W	7160	8480	9680	10,760	11,760	12,700	13,600	14,500	15,300	16,100			
20.8R42 2* R1, R1W	7560	8960	10,200	11,360	12,400	13,400	14,300	15,300	16,200	17,100			
620/70R42 160A8 R1W	9390	9860	11,450	13,240	13,810	14,800	16,660	17,930	18,780	20,480			
710/70R38 166A8 R1W	11,090	11,770	13,630	15,310	16,510	17,750	19,970	21,080	22,190	24,210			

Rear Tires (used as duals)

14.9R46 3* R1	7960	9400	10,720	11,880	13,040	14,080	15,120	16,040	17,040	17,880	18,720	19,560	20,560
420/80R46 3* R1	10,590	11,440	13,330	14,860	15,870	17,360	19,530	20,260	21,320	23,260	25,140	25,840	27,680
18.4R38 1* R1	10,400	12,320	14,000	15,640	17,120	18,520	20,000						
18.4R42 2* R1, R1W, R2	11,000	13,040	14,800	16,480	18,040	19,520	21,120	22,160	23,400	24,480			
18.4R46 3* R1	11,560	13,640	15,560	17,320	19,000	20,480	21,640	23,400	24,640	26,040	27,280	28,520	30,080
20.8R38 1* R1, R2	12,600	14,920	17,040	18,920	20,680	22,360	23,920						
20.8R38 153A8 R1W	12,600	14,920	17,040	18,920	20,680	22,360	23,920	25,520	26,920	28,320			
20.8R42 2* R1, R1W	13,320	15,760	17,960	20,000	21,840	23,600	25,160	26,920	28,520	30,080			
620/70R42 160A8 R1W	16,550	17,360	20,160	23,300	24,290	26,040	29,300	31,570	33,040	36,040			

Rear Tires (used as triples)

14.9R46 3* R1	11,100	13,140	14,940	16,620	18,180	19,680	21,180	22,440	23,820	25,020	26,160	27,360	28,740
420/80R46 3* R1	14,770	15,940	18,590	20,730	22,250	24,280	27,310	28,320	29,870	32,590	35,140	36,150	38,730

Rear Tires (used as singles) Metric

TIRE SIZE	MAXIMUM REAR TRACTOR WEIGHT (kg) AT VARIOUS COLD INFLATION PRESSURES (kPa)												
	41	55	69	83	97	110	124*	138*	152	165**	179	193	207***
14.9R46 3* R1	2050	2420	2760	3070	3360	3630	3900	4140	4390	4610	4830	5040	5300
420/80R46 3* R1	2730	2940	3430	3830	4100	4470	5030	5220	5510	6010	6460	6660	7130
18.4R38 1* R1	2690	3180	3610	4030	4410	4770	5150						
18.4R42 2* R1, R1W, R2	2830	3360	3810	4250	4650	5030	5440	5720	6030	6310			
18.4R46 3* R1	2980	3520	4010	4460	4900	5280	5580	6030	6350	6710	7030	7350	7760
20.8R38 1* R1, R2	3250	3850	4390	4880	5330	5760	6170						
20.8R38 153A8 R1W	3250	3850	4390	4880	5330	5760	6170	6580	6940	7300			
20.8R42 2* R1, R1W	3430	4060	4630	5150	5630	6080	6490	6940	7350	7760			
620/70R42 160A8 R1W	4260	4470	5190	6010	6260	6710	7560	8130	8520	9290			
710/70R38 166A8 R1W	5030	5340	6180	6950	7490	8050	9060	9560	10,070	10,980			
Rear Tires (used as duals)													
14.9R46 3* R1	3610	4260	4860	5390	5920	6390	6860	7280	7730	8110	8490	8870	9330
420/80R46 3* R1	4800	5190	6050	6740	7200	7870	8860	9190	9670	10,550	11,400	11,720	12,560
18.4R38 1* R1	4720	5590	6350	7090	7770	8400	9070						
18.4R42 2* R1, R1W, R2	4990	5920	6710	7480	8180	8850	9580	10,050	10,610	11,100			
18.4R46 3* R1	5240	6190	7060	7860	8620	9290	9820	10,610	11,180	11,810	12,370	12,940	13,640
20.8R38 1* R1, R2	5720	6770	7730	8580	9380	10,140	10,850						
20.8R38 153A8 R1W	5720	6770	7730	8580	9380	10,140	10,850	11,580	12,210	12,850			
20.8R42 2* R1, R1W	6040	7150	8150	9070	9910	10,710	11,410	12,210	12,940	13,640			
620/70R42 160A8 R1W	7510	7870	9150	10,570	11,020	11,810	13,290	14,320	14,990	16,350			
Rear Tires (used as triples)													
14.9R46 3* R1	5040	5960	6780	7540	8250	8930	9610	10,180	10,800	11,350	11,870	12,410	13,040
420/80R46 3* R1	6700	7230	8430	9400	10,090	11,010	12,390	12,850	13,550	14,780	15,940	16,400	17,570

Click on the image link below for the full
version of the service manual

