


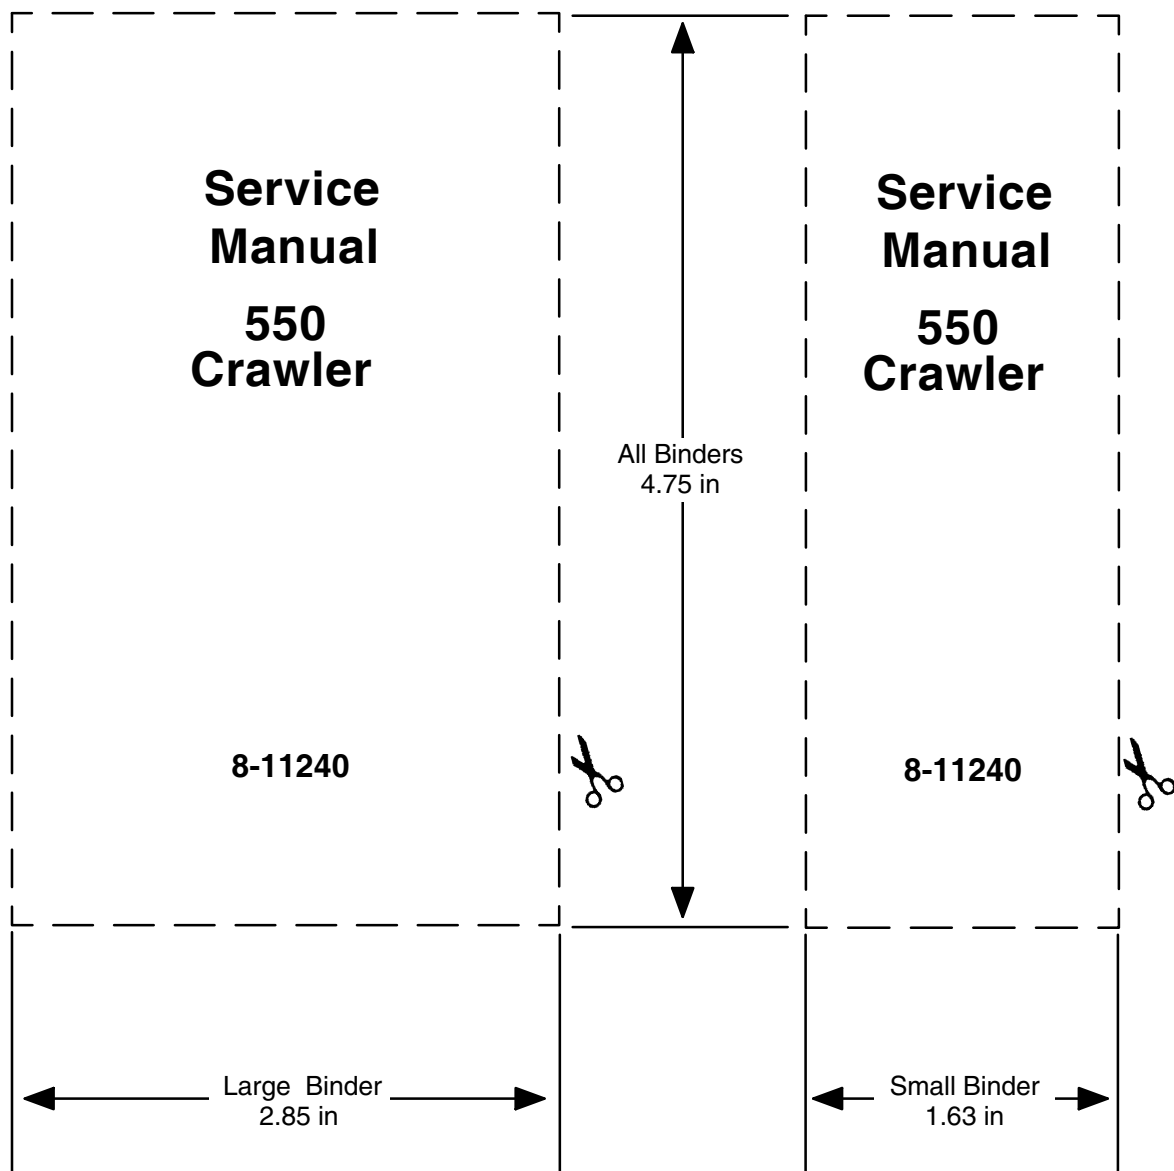

550 Crawler

Table of Contents

DIVISION/SECTION	SECTION NO.	FORM NO.
1 GENERAL		
Section Index - General		8-13600
Standard Torque Specifications.....	1001	8-71600
Fluids and Lubricants	1002	8-13610
Detailed Engine Specifications	1024	8-24161
ENGINE		
Section Index - Engine.....		8-13620
Stall Tests.....	2000	8-72232
Engine Removal and Installation	2001	8-72241
Cylinder Head and Valve Train.....	2415	8-24171
Cylinder Block	2425	8-24181
Lubrication System.....	2445	8-24191
Cooling System	2455	8-24201
3 FUEL SYSTEM		
Section Index - Fuel System		8-13630
Fuel System and Filters	3410	8-24211
Fuel Injection Pump and Drive Gear	3412	8-27080
Fuel Injectors.....	3413	8-24231
4 ELECTRICAL		
Section Index - Electrical		8-13641
Removal and Installation of Electrical Components.....	4001	8-13650
Specifications, Troubleshooting, and Schematics	4002	8-13660
Batteries	4003	8-11360
Instrument Panel and Gauges.....	4004	8-13670
Starter and Starter Solenoid.....	4006	8-42910
65 Amp Alternator A187873.....	4007	8-15670
65 Amp Alternator A186125.....	4019	8-12902
5 TRACK		
Section Index - Track		8-13681
Inspection of Track System Components	5501	8-15690
Case Lubricated Track.....	5504	8-13691
Sealed Track and Track Frame	5506	8-13701
Idler, Track Adjuster and Recoil Housing.....	5508	8-13710
Sprocket	5509	8-72571
Carrier Roller	5510	8-13730
Track Roller	5511	8-13740

6 POWER TRAIN

Section Index - Power Train		8-13751
Transmission Specifications and Troubleshooting Before P.I.N. JAK0013968	6002	8-13762
Transmission Specifications and Troubleshooting P.I.N. JAK0013968 and After	6003	8-15700
Charging Pump	6005	8-13770
Transmission Control Valve	6007	8-13810
Modulator Valve	6008	8-72611
Torque Converter Before P.I.N. JAK0013968	6010	8-13781
Torque Converter P.I.N. JAK0013968 and After	6011	8-17510
Transmission	6016	8-13791
Final Drive	6017	8-72650

7 BRAKES

Brakes	7001	8-13830
--------------	------	---------

8 HYDRAULICS

Section Index - Hydraulics		8-13840
Specifications, Troubleshooting and Schematics	8002	8-13851
Cleaning the Hydraulic System	8003	8-13860
Equipment Pump	8005	8-13870
Equipment Control Valve	8007	8-13880
Cylinders	8008	8-13890
Backhoe Control Valve	8107	8-13900
Stabilizer Control Valve	8109	8-13910

9 MOUNTED EQUIPMENT

Section Index - Mounted Equipment		8-13920
Pedals and Levers	9001	8-13950
Blade	9002	8-13930
Ripper	9031	8-72750
ROPS Canopy and Seats	9061	8-72770
Backhoe	9100	8-13940

1001

STANDARD TORQUE SPECIFICATIONS

TABLE OF CONTENTS

Torque Specifications - Decimal Hardware.....	1001-2	Torque Specifications - Steel Hydraulic Fittings.....	1001-4
Torque Specifications - Metric Hardware...	1001-3	Torque Specifications - O-ring Face Seal Fittings.....	1001-5

TORQUE SPECIFICATIONS - DECIMAL HARDWARE

Use the torques in this chart when special torques are not given. These torques apply to fasteners with both UNC and UNF threads as received from suppliers, dry, or when lubricated with engine oil. Not applicable if special graphites, molydisulfide greases, or other extreme pressure lubricants are used.

Grade 5 Bolts, Nuts, and Studs 		
Size	Pound-Feet	Newton metres
1/4 in	9-11	12-15
5/16 in	17-21	23-28
3/8 in	35-42	48-57
7/16 in	54-64	73-87
1/2 in	80-96	109-130
9/16 in	110-132	149-179
5/8 in	150-180	203-244
3/4 in	270-324	366-439
7/8 in	400-480	542-651
1.0 in	580-696	787-944
1-1/8 in	800-880	1085-1193
1-1/4 in	1120-1240	1519-1681
1-3/8 in	1460-1680	1980-2278
1-1/2 in	1940-2200	2631-2983

Grade 8 Bolts, Nuts, and Studs 		
Size	Pound-Feet	Newton metres
1/4 in	12-15	16-20
5/16 in	24-29	33-39
3/8 in	45-54	61-73
7/16 in	70-84	95-114
1/2 in	110-132	149-179
9/16 in	160-192	217-260
5/8 in	220-264	298-358
3/4 in	380-456	515-618
7/8 in	600-720	814-976
1.0 in	900-1080	1220-1465
1-1/8 in	1280-1440	1736-1953
1-1/4 in	1820-2000	2468-2712
1-3/8 in	2380-2720	3227-3688
1-1/2 in	3160-3560	4285-4827
NOTE: Use thick nuts with Grade 8 bolts.		

TORQUE SPECIFICATIONS - METRIC HARDWARE

Use the following torques when special torques are not given.

These values apply to fasteners with coarse threads as received from supplier, plated or unplated, or when lubricated with engine oil. These values do not apply if graphite or molydisulfide grease or oil is used.

Grade 8.8 Bolts, Nuts, and Studs 		
Size	Pound-Feet	Newton metres
M4	2-3	3-4
M5	5-6	6.5-8
M6	8-9	10.5-12
M8	19-23	26-31
M10	38-45	52-61
M12	66-79	90-107
M14	106-127	144-172
M16	160-200	217-271
M20	320-380	434-515
M24	500-600	675-815
M30	920-1100	1250-1500
M36	1600-1950	2175-2600

Grade 10.9 Bolts, Nuts, and Studs 		
Size	Pound-Feet	Newton metres
M4	3-4	4-5
M5	7-8	9.5-11
M6	11-13	15-17.5
M8	27-32	37-43
M10	54-64	73-87
M12	93-112	125-15
M14	149-179	200-245
M16	230-280	310-380
M20	450-540	610-730
M24	780-940	1050-1275
M30	1470-1770	2000-2400
M36	2580-3090	3500-4200

Grade 12.9 Bolts, Nuts, and Studs



Usually the torque values specified for grade 10.9 fasteners can be used satisfactorily on grade 12.9 fasteners.

TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS

Tube OD Hose ID	Thread Size	Pound- Feet	Newton metres
37 Degree Flare Fittings			
1/4 in 6.4 mm	7/16-20	6-12	8-16
5/16 in 7.9 mm	1/2-20	8-16	11-21
3/8 in 9.5 mm	9/16-18	10-25	14-33
1/2 in 12.7 mm	3/4-16	15-42	20-56
5/8 in 15.9 mm	7/8-14	25-58	34-78
3/4 in 19.0 mm	1-1/16-12	40-80	54-108
7/8 in 22.2 mm	1-3/16-12	60-100	81-135
1.0 in 25.4 mm	1-5/16-12	75-117	102-158
1-1/4 in 31.8 mm	1-5/8-12	125-165	169-223
1-1/2 in 38.1 mm	1-7/8-12	210-250	285-338

Tube OD Hose ID	Thread Size	Pound- Feet	Newton metres
Straight Threads with O-ring			
1/4 in 6.4 mm	7/16-20	12-19	16-25
5/16 in 7.9 mm	1/2-20	16-25	22-23
3/8 in 9.5 mm	9/16-18	25-40	34-54
1/2 in 12.7 mm	3/4-16	42-67	57-90
5/8 in 15.9 mm	7/8-14	58-92	79-124
3/4 in 19.0 mm	1-1/16-12	80-128	108-174
7/8 in 22.2 mm	1-3/16-12	100-160	136-216
1.0 in 25.4 mm	1-5/16-12	117-187	159-253
1-1/4 in 31.8 mm	1-5/8-12	165-264	224-357
1-1/2 in 38.1 mm	1-7/8-12	250-400	339-542

Split Flange Mounting Bolts		
Size	Pound- Feet	Newton metres
5/16-18	15-20	20-27
3/8-16	20-25	26-33
7/16-14	35-45	47-61
1/2-13	55-65	74-88
5/8-11	140-150	190-203

TORQUE SPECIFICATIONS - O-RING FACE SEAL FITTING

Nom. SAE Dash Size	Tube OD	Thread Size	Pound- Feet	Newton Metres	Thread Size	Pound- Feet	Newton Metres
O-ring Face Seal End					O-ring Boss End Fitting or Locknut		
-4	1/4 in 6.4 mm	9/16-18	10-12	14-16	7/16-20	17-20	23-27
-6	3/8 in 9.5 mm	11/16-16	18-20	24-27	9/16-18	25-30	33-40
-8	1/2 in 12.7 mm	13/16-16	32-40	43-54	3/4-16	45-50	61-68
-10	5/8 in 15.9 mm	1-14	46-56	60-75	7/8-14	60-65	81-88
-12	3/4 in 19.0 mm	1-3/16-12	65-80	90-110	1-1/16-12	85-90	115-122
-14	7/8 in 22.2 mm	1-3/16-12	65-80	90-110	1-3/16-12	95-100	129-136
-16	1.0 in 25.4 mm	1-7/16-12	92-105	125-140	1-5/16-12	115-125	156-169
-20	1-1/4 in 31.8 mm	1-11/16-12	125-140	170-190	1-5/8-12	150-160	203-217
-24	1-1/2 in 38.1 mm	2-12	150-180	200-254	1-7/8-12	190-200	258-271

Click on the image link below for the full version of the service manual

